

Thixotropic gravity currents

DUNCAN R. HEWITT¹ †
AND NEIL J. BALMFORTH²

¹Department of Applied Mathematics and Theoretical Physics, University of Cambridge,
Wilberforce Road, Cambridge, CB3 0WA, UK.

²Department of Mathematics, University of British Columbia, Vancouver, B.C. V6T 1Z2,
Canada.

(Received ?; revised ?; accepted ?. - To be entered by editorial office)

We present a model for thixotropic gravity currents flowing down an inclined plane that combines lubrication theory for shallow flow with a rheological constitutive law describing the degree of microscopic structure. The model is solved numerically for a finite volume of fluid in both two and three dimensions. The results illustrate the importance of the degree of initial ageing and the spatio-temporal variations of the microstructure during flow. The fluid does not flow unless the plane is inclined beyond a critical angle that depends on the ageing time. Above that critical angle and for relatively long ageing times, the fluid dramatically avalanches downslope, with the current becoming characterised by a structured horseshoe-shaped remnant of fluid at the back and a raised nose at the advancing front. The flow is prone to a weak interfacial instability that occurs along the border between structured and de-structured fluid. Experiments with bentonite clay show broadly similar phenomenological behaviour to that predicted by the model. Differences between the experiments and the model are discussed.

Key words: Complex fluids, thixotropy, gravity currents.

1. Introduction

Thixotropic fluids have a time-dependent microstructure that gradually builds up when the fluid is at rest, leading to a slow increase in the effective viscosity, but is reversibly broken down by flow, thereby lowering the fluid’s resistance (Mewis & Wagner 2009). A wide range of fluids exhibit thixotropic behaviour, including natural clay suspensions, industrial drilling fluids and cements, printing inks and paints, oils and grease, and food products such as mayonnaise and ketchup (Barnes 1997; Mewis & Wagner 2009). A key feature of these thixotropic fluids is that they may experience so-called “viscosity bifurcations” (Coussot *et al.* 2002*a*; Bonn *et al.* 2004; Moller *et al.* 2009; Alexandrou *et al.* 2009): if the fluid is jammed in a structured or solid state with high viscosity, an increase in the stress on the material beyond a critical threshold can cause the microstructure to abruptly disintegrate, substantially lowering the viscosity and initiating sudden fluid flow. Moreover, if the stress is reduced below another (typically lower) critical value, the microstructure can swiftly recover and jam, abruptly increasing the viscosity and blocking flow.

Gravity currents form a particularly important class of flows in which viscosity bifurcations can play a significant role. Many geophysical muds and clays appear to be thixotropic, and the relatively sudden and long runouts of mudslides and “quick-clay”

† Email address for correspondence: drh39@cam.ac.uk

avalanches has been suggested to originate from this rheology (Khaldoun *et al.* 2009). In industrial settings, currents of mine tailings and waste mineral slurries have been observed to flow much further than predicted (Henriquez & Simms 2009; Simms *et al.* 2011), with potentially serious environmental consequences. On a different scale, household food-stuffs such as ketchup are often tested in the ‘‘Bostwick consistometer’’ (a variant of the classical dambreak problem in which material is suddenly released and slumps down a channel; Balmforth *et al.* 2006a), yet the confounding role that thixotropy can play in such a device is usually ignored.

Key features of thixotropic gravity currents were documented in the experiments of Coussot *et al.* (2002a). These authors observed that a suspension of bentonite clay emplaced as a mound on an inclined plane did not flow provided the slope was below a certain critical angle. Above that angle, however, the mound collapsed dramatically, with a fraction of the clay flowing rapidly down the incline, and a horseshoe-shaped remnant of immobile material being left behind. The critical angle corresponds to the stress at which a viscosity bifurcation occurs; the avalanching fluid having de-structured and separated from the structured horseshoe-shaped remnant. For uniform layers on an inclined plane, Huynh *et al.* (2005) showed that the critical angle increased if the fluid was left to rest and ‘‘age’’ for longer. Similar ‘‘avalanche’’ behaviour was recorded for clay suspensions by Khaldoun *et al.* (2009); these authors also reported that the collapse was mediated by a thin de-structured basal layer, upon which the overlying rigid bulk of the material was conveyed.

Although previous work has proposed constitutive laws describing the viscosity bifurcations of thixotropic fluid (see §2), there have been few attempts to couple such rheological models with the detailed flow dynamics. In particular, there has been no attempt to model the spatio-temporal evolution of a thixotropic gravity current on an inclined plane. Our aim in the current paper is to provide such a model. In particular, we present a detailed shallow-layer theory that describes the release of a finite volume of thixotropic fluid on a slope. Such theories are well documented for Newtonian (Huppert 1982; Lister 1992) and viscoplastic (Liu & Mei 1989; Balmforth *et al.* 2002, 2006b) fluids.

Our rheological model, a simple thixotropic constitutive law incorporating viscosity bifurcations, is described in §2. In §3, we couple this rheology with lubrication theory for shallow flow. We solve the equations of the model numerically in section §4, in both two and three dimensions, and discuss the main features of the flow. In §5, we present experimental results for gravity current of an aqueous suspension of bentonite clay. There is broad agreement between the theory and experiments, but there are also some notable differences, which are discussed here. Finally, in §6 we summarize our main results. In exploring the theoretical model, we encounter a novel type of interfacial instability; additional details of this feature of the model are presented in the Appendix.

2. Rheological model

2.1. Background

Viscosity bifurcations can be rationalized using simple constitutive models that exploit a parameter, $\lambda(t)$, which describes the degree of internal structure (Barnes 1997; Mewis & Wagner 2009). Here, we take this parameter to lie in the range $[0, \lambda_0]$: the fluid has no effective microstructure if $\lambda = 0$, but is fully structured and solid-like when $\lambda = \lambda_0 \leq 1$. The structure parameter controls the viscosity $\mu(\lambda)$ in the generalized Newtonian fluid model,

$$\tau_{ij} = \mu(\lambda) \dot{\gamma}_{ij}, \quad (2.1)$$

which relates the deviatoric stress tensor τ_{ij} to the rate of strain tensor $\dot{\gamma}_{ij}$. The structure parameter is often taken to satisfy an evolution equation of the form,

$$\frac{d\lambda}{dt} = g(\lambda, \dot{\gamma}) = G(\lambda, \tau), \quad (2.2)$$

where $\dot{\gamma} = \sqrt{\dot{\gamma}_{ij}\dot{\gamma}_{ij}/2}$ and $\tau = \sqrt{\tau_{ij}\tau_{ij}/2}$ denote tensor invariants, and $G(\lambda, \tau)$ follows from $g(\lambda, \dot{\gamma})$ on using (2.1). Various forms for $\mu(\lambda)$ and $g(\lambda, \dot{\gamma})$ have been proposed in the literature (Coussot *et al.* 2002*a,b*; Moller *et al.* 2006; Dullaert & Mewis 2006; Putz & Burghilea 2009; Alexandrou *et al.* 2009). In general, $g(\lambda, \dot{\gamma})$ contains a positive term corresponding to restructuring or ‘‘healing’’, and a negative term proportional to $\dot{\gamma}$ describing the de-structuring effects of flow. The viscosity $\mu(\lambda)$ increases with structure, and becomes large or even diverges as the fluid becomes fully structured.

The viscosity bifurcations occurring as stress is varied are conveniently illustrated using the quasi-steady version of (2.2), $G(\lambda, \tau) = 0$. The overall idea is that, for low or vanishing stress, $G(\lambda, \tau)$ is a positive, decreasing function of λ that vanishes only for $\lambda = \lambda_0$; see figure 1(*a*). As is clear from (2.2), $G(\lambda_0, \tau) = 0$ corresponds to a fully structured equilibrium state that is stable when $\partial G(\lambda_0, \tau)/\partial\lambda < 0$. As the stress is increased, the curve representing $G(\lambda, \tau)$ is pushed down somewhere over the range of λ , eventually touching the $G(\lambda, \tau) = 0$ axis and creating two new equilibrium states, $\lambda = \lambda_{\pm}$, at a critical stress, $\tau = \tau_C$. The newly created state with less structure, $\lambda = \lambda_- < \lambda_+$, is stable, whilst that with an intermediate degree of structure, $\lambda = \lambda_+$, is unstable. The fully structured state $\lambda = \lambda_0$ persists during the bifurcation, however, and remains stable, implying that the fluid would remain in this state if it was prepared so before the stress was increased.

A second viscosity bifurcation arises if the stress is increased still further: the curve of $G(\lambda, \tau)$ continues to be driven downwards, and the unstable equilibrium moves to higher λ . Eventually, this state collides with the fully structured solution at $\lambda = \lambda_0$, rendering that equilibrium unstable ($\partial G(\lambda_0, \tau)/\partial\lambda$ becomes positive). This bifurcation occurs at stress $\tau = \tau_A$; for higher stresses $\tau \geq \tau_A$, the only stable equilibrium in the range $[0, \lambda_0]$ is $\lambda = \lambda_-$. Therefore, all structure disintegrates and evolves towards the de-structured equilibrium, even if the fluid were initially fully structured. The set of curves with increasing stress in figure 1(*a*) illustrate a sequence of such situations.

The behaviour of the structure function in figure 1(*a*) implies a hysteretic relation between stress τ and strain rate $\dot{\gamma}$ if the stress on a sample of fluid is first ramped up until flow occurs, and then decreased back down until the flow subsides. More specifically, as sketched in figure 1(*b*), the fluid is initially static and fully structured ($\lambda = \lambda_0$ and $\dot{\gamma} = 0$), and remains so until that state loses its stability at $\tau = \tau_A$. The fluid structure then disintegrates and evolves towards the less structured state $\lambda = \lambda_-$ with finite shear rate. If the stress is then lowered, the flowing, less structured state of the fluid is preserved until τ falls below τ_C , at which juncture that state disappears. Thereafter, the flow can no longer destroy the microstructure at the same pace as it heals, and the fluid evolves back towards the structured state, with the viscosity abruptly increasing and the flow coming to a halt.

2.2. The rheological model

Our aim is to present a simple model of thixotropic gravity currents. For the task, we incorporate the thixotropic rheology, and specifically the viscosity bifurcations, in as simple a manner as possible. More precisely, we use the structure function shown in figure 1(*a*) to relate the local stress to the microstructural state. That is, given the stress, we solve $G(\lambda, \tau) = 0$ to determine λ , and thence the viscosity, $\mu(\lambda)$.

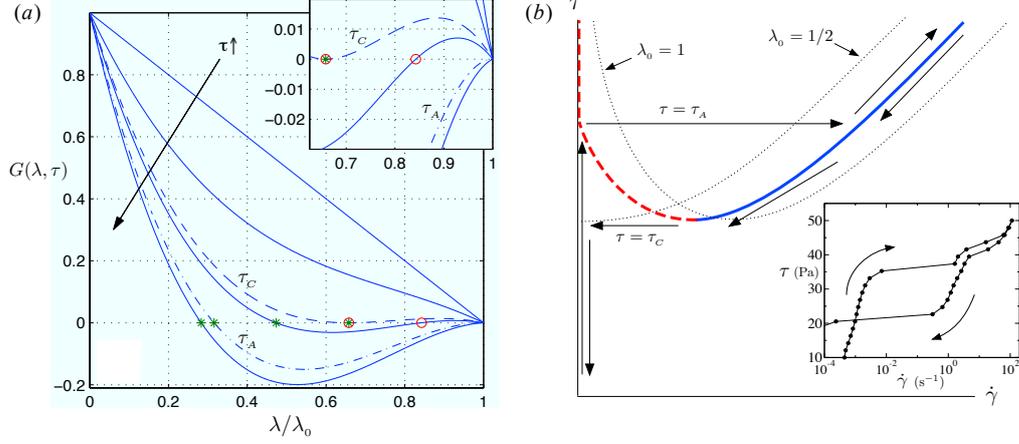


Figure 1: (a) The structure function $G(\lambda, \tau)$ for four values of the stress τ . The curves are based on the model (2.4). The dashed and dot-dashed curves show the critical cases $\tau = \tau_C$ and $\tau = \tau_A$. Stars indicate the stable, less structured equilibrium states, and circles indicate the unstable, intermediate structured states. Panel (b) shows a sketch of the hysteretic stress-strain-rate relation, with the arrows indicating the pathway expected for an experiment in which stress is first increased past the critical value τ_A , and then decreased back below τ_C . The dashed line shows the unstable, intermediate structured equilibrium. The light dotted lines show the stress-strain-rate relations for $\lambda_0 = 1/2$ (idealized yield-stress-like behaviour) and $\lambda_0 = 1$ ($\tau_A \rightarrow \infty$). The inset shows rheometric data for a bentonite clay suspension (7.5wt% \approx 10% by volume) in a cone and plate rheometer. The stress was increased from 10 Pa to 50 Pa in 20 steps, and then decreased again, waiting for 5 seconds at each stress level. The fluid was pre-sheared for 2 minutes at 100 Pa, and left to rest for 5 minutes before starting the test.

A convenient form for the structure function is furnished by the models,

$$g(\lambda, \dot{\gamma}) = \frac{(\lambda_0 - \lambda)}{\lambda_0 T} - \alpha \lambda \dot{\gamma} \quad \text{and} \quad \mu(\lambda) = \frac{\mu_0 \lambda_0}{(1 - \lambda)(\lambda_0 - \lambda)}, \quad (2.3a, b)$$

which imply

$$G(\lambda, \tau) = \frac{(\lambda_0 - \lambda)}{\lambda_0 T} [1 - \Gamma \lambda (1 - \lambda) \tau] = 0, \quad (2.4)$$

where T and α are positive empirical constants, μ_0 is a constant reference viscosity and $\Gamma = \alpha T / \mu_0$. The two terms on the right-hand side of (2.3a) can be interpreted as the healing of the microstructure and flow-induced de-structuring, respectively.

The forms in (2.3) are similar, but not identical, to those suggested by Barnes (1997), and many authors since. The main differences are the factor $(\lambda_0 - \lambda)(1 - \lambda)$ in $\mu(\lambda)$ (2.3b) rather than a power of $(1 - \lambda)$, and our identification of the fully structured state as $\lambda = \lambda_0$, not $\lambda = 1$ or $\lambda = \infty$. These differences are key to ensuring that there is a second viscosity bifurcation at $\tau = \tau_A$ as discussed above, and to accommodate differing degrees of initial ageing (see §2.3 below). In any event, (2.4) is an especially convenient form of the structure function, because it can be solved analytically to give the three

branches of the stress-strain-rate relation:

$$\lambda = \lambda_0, \quad \lambda = \lambda_{\pm}(\tau) = \frac{1}{2} \left[1 \pm \left(1 - \frac{4}{\Gamma\tau} \right)^{1/2} \right]. \quad (2.5a, b)$$

The points of bifurcation can also be determined analytically: the stable-unstable pair of equilibria, $\lambda = \lambda_{\pm}$, appear for $\tau > \tau_C = 4/\Gamma$; and the fully structured state is unstable for $\tau > \tau_A = [\Gamma\lambda_0(1 - \lambda_0)]^{-1}$.

Over the range $\tau_C < \tau < \tau_A$, the stress-strain-rate relation has three possible solutions, raising the question of how to select the appropriate structural state given the stress. We dismiss the choice $\lambda = \lambda_+$, as this state corresponds to an unstable equilibrium. The selection between the other two options, $\lambda = \lambda_-$ and $\lambda = \lambda_0$ is dictated by the stress history of the fluid: if the material has never been subjected to a stress exceeding τ_A , then the fluid structure has never disintegrated, and $\lambda = \lambda_0$. On the other hand, if the structure did disintegrate at some moment in the past (with $\tau > \tau_A$), then the fluid is in its less structured state, and $\lambda = \lambda_-$.

Note that our use of $G(\lambda, \tau)$ in this fashion corresponds to assuming that the disintegration of the microstructure for $\tau \geq \tau_A$, or restructuring for $\tau \leq \tau_C$, is instantaneous (as in a kind of rapid phase transition). The differential constitutive law in (2.2) allows for a more general version of the scenario, and in particular for delays in disintegration or restructuring. Hence, our model can be thought of as the quasi-steady version of (2.2). However, retaining the time rate of change of λ in the rheological model complicates the theory significantly. On the other hand, constitutive laws are often little more than mathematical formulations of flow-curve cartoons based on a combination of physical intuition and rheometric data. Hence, it is not clear that (2.2) conveys much more physical realism than the statement $G(\lambda, \tau) = 0$. Indeed, when supplemented with the rules for selecting amongst the multiple branches of the stress-strain-rate relation, (2.4) can be viewed as a constitutive law in its own right.

2.3. Ageing

Rheological measurements (see *e.g.* Moller *et al.* 2009) suggest that the critical threshold for flow to begin, τ_A , depends on the ageing time of the fluid T_{age} . This timescale can be of the order of several minutes or even hours, and is typically longer than the duration of a gravity current flowing down an incline in a laboratory experiment. We therefore make the assumption that, although ageing controls the threshold for initiation of flow, it takes place too slowly to influence the dynamics of the gravity current.

We incorporate the effect of ageing into our model *via* the parameter λ_0 . More precisely, as shown in figure 1(b), when $\lambda_0 \rightarrow \frac{1}{2}$, the hysteresis loop of the stress-strain-rate relation disappears, leaving a single-valued curve representing the stable equilibrium. This state is fully structured for $\tau < \tau_C = \tau_A = 4/\Gamma$, but de-structures and flows at higher stresses. That is, structure formation and disintegration take place at a common critical or yield value; the behaviour is equivalent to that of an idealized yield-stress fluid (with a nonlinear viscosity). If the fluid were not left to age at all, this would correspond to the observed situation. As $\lambda_0 \rightarrow 1$, on the other hand, the threshold τ_A diverges, which indicates (somewhat unphysically) that the fluid never de-structures. This situation is suggestive of an arbitrarily long period of ageing. Thus, taking different values for λ_0 between these two limits allows for differing degree of initial ageing: the bigger the value of λ_0 , the longer the ageing time T_{age} .

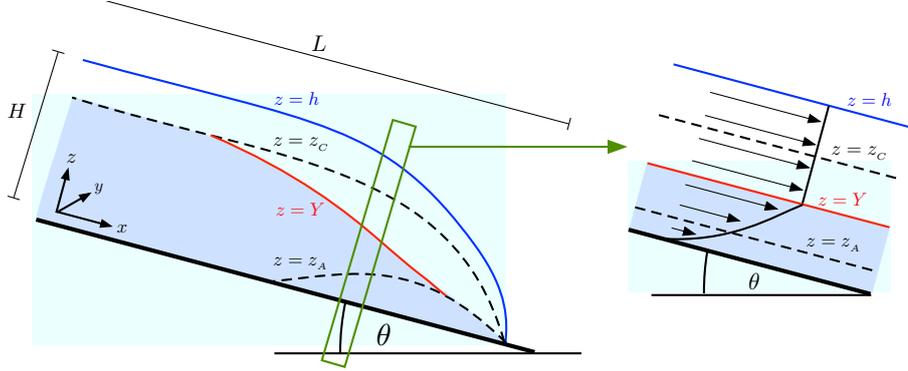


Figure 2: A sketch of the flow geometry, showing the coordinate system, the characteristic length and depth, L and H , the local fluid depth $h(x, y, t)$, and the curves of the constant critical shear stresses, $z_A = z(\tau_A)$ and $z_C = z(\tau_C)$. The border between structured and destructured fluid, $z = Z(x, y, t)$, is pieced together from $z = z_A$, z_C and a material section, $z = Y(x, y, t)$; destructured fluid is shown shaded. The left-hand plot shows the profile in z of u through a slice of the flow.

3. Shallow flow model

3.1. Dimensional formulation

As sketched in figure 2, we consider flow over an inclined plane with velocity $\mathbf{u} = (u, v, w)$ described by a Cartesian coordinate system (x, y, z) , orientated such that the x -axis points downslope and the y -axis points across the slope. The plane is inclined at an angle θ . The fluid is shallow, with a characteristic depth H that is much smaller than the characteristic lengthscale for variations over the plane, L , so that the aspect ratio is $\varepsilon = H/L \ll 1$. The local fluid depth is $z = h(x, y, t)$.

The flow is incompressible,

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} = 0, \quad (3.1)$$

and satisfies the momentum equations,

$$\rho \left(\frac{\partial \mathbf{u}}{\partial t} + \mathbf{u} \cdot \nabla \mathbf{u} \right) = \rho \tilde{\mathbf{g}} - \nabla p + \nabla \cdot \boldsymbol{\tau}, \quad (3.2)$$

where p is the pressure, and $\tilde{\mathbf{g}} = (g \sin \theta, 0, -g \cos \theta)$, with constant gravitational acceleration g . The deviatoric stresses are related to the rate of strains by (2.1), and the viscosity is set according to (2.3) and (2.4). Just prior to the moment that the fluid is released, the material is fully and uniformly structured, so that $\lambda = \lambda_0$.

The boundary conditions are given by no slip at the base and the stress-free condition at the upper boundary:

$$\mathbf{u} = 0 \quad \text{at} \quad z = 0, \quad (\tau_{ij} - p\delta_{ij}) n_j = 0 \quad \text{at} \quad z = h(x, y, t), \quad (3.3a, b)$$

where \mathbf{n} is the normal to the surface $z = h$. The kinematic condition at the upper boundary is

$$\frac{\partial h}{\partial t} + u \frac{\partial h}{\partial x} + v \frac{\partial h}{\partial y} - w = 0 \quad \text{at} \quad z = h(x, y, t). \quad (3.4)$$

3.2. Dimensionless leading-order formulation

To remove the dimensions from the equations and pave the way for the shallow-layer theory, we introduce the rescalings,

$$t = \frac{L}{U}t^*, \quad (x, y) = L(x^*, y^*), \quad (z, h) = H(z^*, h^*), \quad (3.5)$$

$$(u, v) = U(u^*, v^*), \quad w = \varepsilon U w^*, \quad p = \rho g H p^* \cos \theta, \quad \tau_{ij} = \frac{\mu_0 U}{H} \tau_{ij}^*, \quad (3.6)$$

$$\mu = \mu_0 \mu^*, \quad G = T G^*, \quad \Gamma = \frac{\alpha T U}{H} \Gamma^*, \quad (3.7)$$

where the speed scale

$$U = \frac{H^3 \rho g}{L \mu_0} \cos \theta.$$

On discarding the star decoration, and to leading order in ε , (3.2) reduces to the lubrication equations

$$0 = S - \frac{\partial p}{\partial x} + \frac{\partial \tau_{xz}}{\partial z} = -\frac{\partial p}{\partial y} + \frac{\partial \tau_{yz}}{\partial z} = -1 - \frac{\partial p}{\partial z}, \quad (3.8)$$

where the slope parameter $S = \varepsilon^{-1} \tan \theta$ is assumed to be $O(1)$. The neglect of inertial terms is valid provided that the Reynolds number $Re = \rho U L / \mu_0$ is no larger than $O(\varepsilon^{-1})$. The dimensionless viscosity and structure function can be written as

$$\mu = \frac{\lambda_0}{(\lambda_0 - \lambda)(1 - \lambda)}, \quad G = \frac{(\lambda_0 - \lambda)}{\lambda_0} [1 - \Gamma \tau \lambda (1 - \lambda)] = 0. \quad (3.9a, b)$$

The dominant components of the rate of strain tensor are $\dot{\gamma}_{xz} = \partial u / \partial z + O(\varepsilon^2)$ and $\dot{\gamma}_{yz} = \partial v / \partial z + O(\varepsilon^2)$. Therefore, to leading order, the stress conditions in (3.3b) become

$$p = \dot{\gamma}_{xz} = \dot{\gamma}_{yz} = 0 \quad \text{at} \quad z = h(x, y, t). \quad (3.10)$$

The kinematic condition (3.4) is unchanged after scaling.

Equations (3.8) and (3.10) imply that the pressure is hydrostatic,

$$p = h - z, \quad (3.11)$$

and the shear stresses are given by $(\tau_{xz}, \tau_{yz}) = (h - z)(S - \partial h / \partial x, -\partial h / \partial y)$, so $\tau = \sqrt{\tau_{xz}^2 + \tau_{yz}^2} = (h - z)\mathcal{T}$, with $\mathcal{T} = \sqrt{(S - \partial h / \partial x)^2 + (\partial h / \partial y)^2}$.

3.3. Anatomy of the flow

The rheological model in (3.9) implies that changes in fluid structure occur when the local stress invariant $\tau \equiv (h - z)\mathcal{T}$ becomes equal to one of the critical values, τ_C and τ_A . The stress contours $\tau = \tau_C$ and $\tau = \tau_A$ therefore define two surfaces, $z = z_C = h - \tau_C / \mathcal{T}$ and $z = z_A = h - \tau_A / \mathcal{T}$. Above $z = z_C$, the stress is less than τ_C , indicating that the fluid is structured with $\lambda = \lambda_0$ and $\dot{\gamma} = 0$. That is, the flow is plug-like with $\partial u / \partial z = \partial v / \partial z = 0$. On the other hand, below $z = z_A$, the stress is greater than τ_A , and the fluid is de-structured with $\lambda = \lambda_-$, indicating that there is vertical shear, $\dot{\gamma} > 0$.

Between the two stress surfaces, $z_C < z < z_A$, the structural state of the fluid depends on the stress history of each fluid element. Initially, the fluid is prepared in the fully structured state with $\lambda = \lambda_0$ everywhere. Therefore, when the fluid is released, the de-structured fluid will be exactly bounded above by $z = z_A$. During the ensuing flow, if the stress increases locally this surface may migrate upwards into structured fluid and

de-structure that material. However, the runoff of the fluid can also reduce the local stress, demanding that the surface $z = z_A$ descend through the fluid, leaving behind de-structured fluid. Those fluid elements move with the flow and only de-structure when the local stress falls below τ_c along the level $z = z_c$.

Thus, the interface, or yield surface, $z = Z(x, y, t)$ which separates de-structured fluid from fully structured fluid, must consist of three different segments. First, there is a de-structuring front $Z \equiv z_A$ wherever the surface $z = z_A$ is ascending into currently structured fluid. Second, there is a re-structuring front $Z \equiv z_c$ whenever the surface $z = z_c$ is descending into currently de-structured fluid. Third, in between these fronts there is a yield surface corresponding to the border of material that was initially de-structured by an increase in local stress, but was then left behind as stresses declined; this piece of the yield surface is necessarily a material curve, $Z \equiv Y(x, y, t)$, which satisfies the kinematic condition,

$$\frac{\partial Y}{\partial t} + u \frac{\partial Y}{\partial x} + v \frac{\partial Y}{\partial y} - w = 0 \quad \text{on} \quad z = Y(x, y, t). \quad (3.12)$$

The yield surface and its constituent pieces are illustrated in figure 2.

3.4. Synopsis of the model

In summary, the spreading velocity of our thixotropic current is determined by integrating

$$\mu \frac{\partial u}{\partial z} = \left(S - \frac{\partial h}{\partial x} \right) (h - z) \equiv \tau_{xz} \quad \text{and} \quad \mu \frac{\partial v}{\partial z} = -\frac{\partial h}{\partial y} (h - z) \equiv \tau_{yz}, \quad (3.13a, b)$$

where

$$\mu(\lambda) = \frac{\lambda_0}{(1 - \lambda)(\lambda_0 - \lambda)}, \quad (\lambda_0 - \lambda) [1 - \Gamma \tau \lambda (1 - \lambda)] = 0, \quad (3.14a, b)$$

and

$$\tau = \sqrt{\tau_{xz}^2 + \tau_{yz}^2} = \mathcal{T} (h - z), \quad \mathcal{T} = \sqrt{\left(S - \frac{\partial h}{\partial x} \right)^2 + \left(\frac{\partial h}{\partial y} \right)^2}. \quad (3.15a, b)$$

The relevant root $0 \leq \lambda \leq \lambda_0$ of (3.14b) is given by the local stress history, as discussed in §2.2 and §3.3. The local fluid depth evolves according to (3.4), or, using the integral of (3.1),

$$\frac{\partial h}{\partial t} + \frac{\partial}{\partial x} \int_0^Y (h - z) \frac{\partial u}{\partial z} dz + \frac{\partial}{\partial y} \int_0^Y (h - z) \frac{\partial v}{\partial z} dz = 0. \quad (3.16)$$

The yield surface $z = Z(x, y, t)$ follows $z = z_A = h - \tau_A / \mathcal{T}$ if that curve is moving up into structured fluid, or matches $z = z_c = h - \tau_c / \mathcal{T}$ if this surface is moving down into de-structured fluid. Otherwise, the yield surface evolves as a material curve as in (3.12); equivalently,

$$\frac{\partial Y}{\partial t} + \frac{\partial}{\partial x} \int_0^Y (Y - z) \frac{\partial u}{\partial z} dz + \frac{\partial}{\partial y} \int_0^Y (Y - z) \frac{\partial v}{\partial z} dz = 0. \quad (3.17)$$

We solve equations (3.16)-(3.17) numerically, in both two and three dimensions, using second-order centred finite differences in space, and a second-order midpoint method in time. We place a thin pre-wetting fluid film (of thickness $h = 10^{-3}$) on the substrate to avoid any difficulties with a moving contact line. The flux terms in (3.16) and (3.17) can be evaluated analytically to expedite the computations (the expressions for these integrals are rather convoluted and not very informative, so we avoid quoting them).

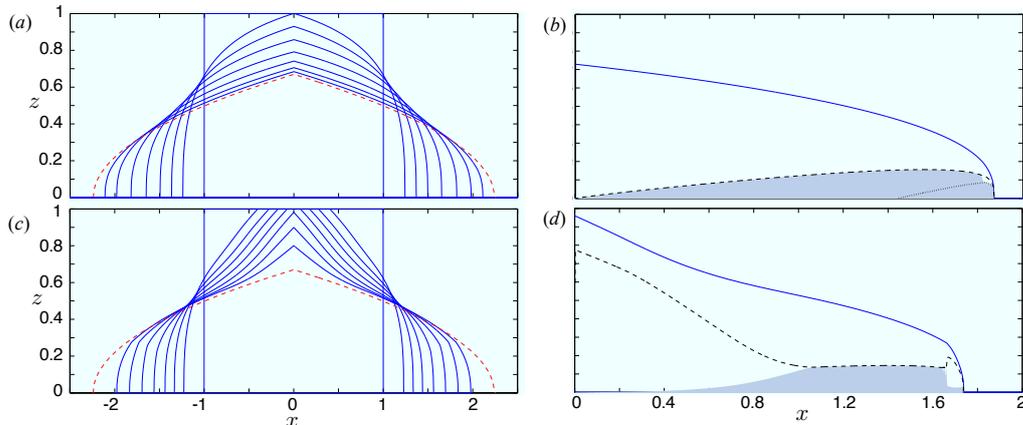


Figure 3: Planar slumps on a horizontal plane ($S = 0$) for (a-b) $\lambda_0 = 0.8$ and (c-d) $\lambda_0 = 0.95$, with $\Gamma = 40$ ($\tau_C = 0.1$). Panels (a) and (c) show snapshots of the free surface $z = h$ at times $t = 0, 1, 2, 4, 8, 16, 32$, and 64 , together with the final rest state (dashed) from (4.2). Panels (b) and (d) show $z = h$ (solid blue), $z = z_C$ (dashed), and $z = z_A$ (dotted) in $x > 0$ at $t = 20$; de-structured fluid is shown shaded. In (b), the material part of the yield surface $z = Y$ is very short, and $Z = z_C$ over most of the fluid. In (d), $z = z_A$ is positive only very close to the moving front.

The characteristic length scales of the flow L and H can be used to scale out two of the free parameters of the problem. For all the results presented here, we fix the total volume of fluid $V = 2$ and the initial height of the fluid $h(t = 0) = 1$. We are then left with three free parameters: the slope S , the structure parameter λ_0 , and Γ , which sets the critical stresses τ_C and τ_A .

4. Numerical results

4.1. Two-dimensional slumps on a horizontal plane

We begin by considering the planar slumping on a horizontal plane ($S = 0$) of a rectangular block of fluid with initial profile, $h(x, 0) = 1$ for $-1 \leq x \leq 1$ and $h(x, 0) = 0$ for $|x| > 1$. Figure 3 shows snapshots of numerical solutions for two values of λ_0 , and $\Gamma = 40$. For the case with less initial structure ($\lambda_0 = 0.8$; panels a-b), the fluid slumps much like an idealized yield-stress fluid (e.g. Balmforth *et al.* 2006b), and the yield surface $z = Z$ lies mostly along the stress contour $z = z_C$. For greater initial structure ($\lambda_0 = 0.95$; panels c-d), the nose of the current advances in a similar fashion to the lower value of λ_0 . However, raised interior the flow collapses much more slowly because the fluid there only de-structures over a relatively thin basal region, the stress never having exceeded τ_A over most of the fluid.

We define $x_N(t)$ as the position of the right-hand nose of the current, and $x_B(t)$ as the location of the rear of the moving section of fluid in $x > 0$ (i.e. the least positive value of x at which $h = 1$; the “back” of the current). In view of the initial condition, $x_N(0) = x_B(0) = 1$, and all the fluid is in motion once x_B decreases to 0. Figure 4 plots time series of $x_N(t)$ and $x_B(t)$ for the two solutions shown earlier in figure 3, along with other solutions for different values of Γ and ageing times. For small Γ , τ_A and τ_C are large and the fluid does not slump very far, coming to rest before x_B reaches the origin. With higher Γ , more fluid de-structures and the slump flows further. The degree of ageing

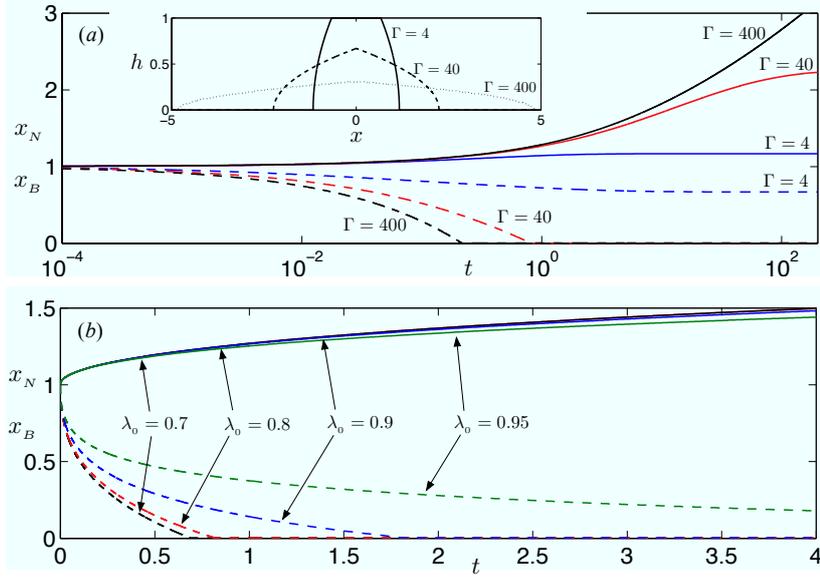


Figure 4: Time series of $x_N(t)$ (solid) and $x_B(t)$ (dashed) for planar slumps on a horizontal plane ($S = 0$). Panel (a) shows results for the values of Γ indicated, at fixed initial structure $\lambda_0 = 0.8$; the inset shows the final states given by (4.2) and (4.3). Panel (b) shows results for the values of λ_0 indicated, at fixed $\Gamma = 40$.

(λ_0) exerts little influence on the advance of the nose of the current because the stress is always increased sufficiently to exceed τ_A by steepening the slope there. However, $x_B(t)$ retreats increasingly slowly as λ_0 increases, in agreement with the results in figure 3.

In all cases, the slump finally comes to rest when all the material re-structures completely. This arises when the stress falls below τ_C everywhere, which, from (3.13) with $z = S = \tau_{yz} = 0$, demands that

$$\left| h \frac{\partial h}{\partial x} \right| \leq \tau_C = \frac{4}{\Gamma}. \quad (4.1)$$

If $\Gamma < 12$, the yield stress τ_C is large enough that x_B never reaches $x = 0$, and a central section of fluid remains immobile with $h = 1$; elsewhere, the equality in (4.1) is attained. Hence,

$$h(x) = \begin{cases} 1 & \text{if } |x| < X_1, \\ [1 - 8\Gamma^{-1}(|x| - X)]^{1/2} & \text{if } |x| \geq X_1; \end{cases} \quad X_1 = 1 - \frac{1}{12}\Gamma. \quad (4.2)$$

If, instead, $\Gamma > 12$, then the fluid fully slumps, the equality in (4.1) applies throughout and

$$h(x) = \left[\frac{8}{\Gamma} (X_2 - |x|) \right]^{1/2}; \quad X_2 = \left(\frac{9\Gamma}{32} \right)^{1/3}. \quad (4.3)$$

The final states predicted by (4.2)-(4.3) are included in figures 3 and 4, and are identical to those obtained for an idealized yield-stress fluid with yield stress τ_C (see *e.g.* Balmforth *et al.* 2006a). Although the final slumped states do not depend on the initial structure λ_0 , the numerical results in figure 4 emphasize how the approach to the final state becomes increasingly long as λ_0 increases towards 1.

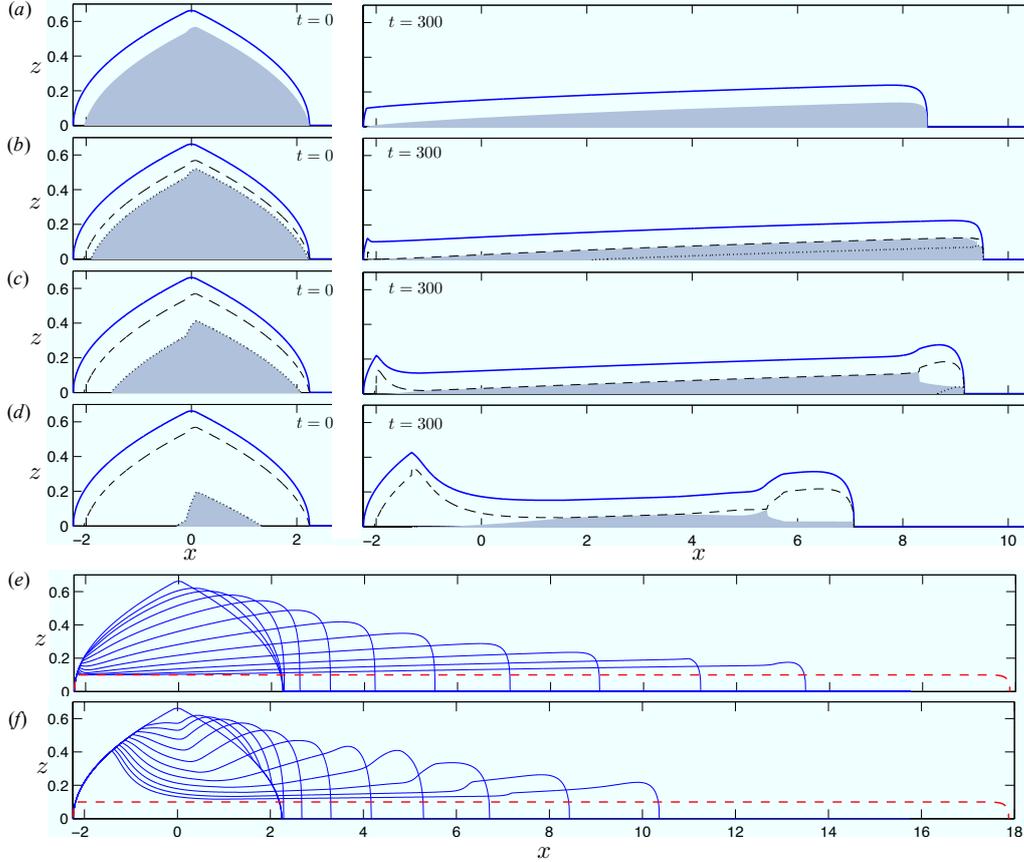


Figure 5: Inclined planar slumps for $S = 1$ and $\Gamma = 40$ ($\tau_C = 0.1$). Shown are the height $z = h$ (solid blue), and the stress contours $z = z_C$ (dashed) and $z = z_A$ (dotted); de-structured fluid is shown shaded. Panels (a)–(d) show profiles at $t = 0$ (left) and $t = 300$, for: (a) a Bingham fluid with yield stress $\tau_C = 0.1$; (b) thixotropic fluid with $\lambda_0 = 0.8$; (c) $\lambda_0 = 0.9$; (d) $\lambda_0 = 0.95$. Initially, $z(\tau_A) = Z$, and at $t = 300$ in (c) and (d), $z(\tau_A)$ is mostly negative. Panels (e)–(f) show snapshots of the height $z = h$ at $t = 0, 10, 20, 40, 80, 160, 320$ and 640 , for (e) $\lambda_0 = 0.8$, and (f) $\lambda_0 = 0.95$; the final states, given by (4.7), are shown by the dashed line.

The numerical solutions in figure 3 expose a crucial hidden detail of the theoretical model. It is evident from the snapshots of $h(x, t)$ that fluid spreads out from the midline of the slumping current at $x = 0$. This spreading is mediated by the de-structured lower layer of the fluid, which conveys along the overlying structured fluid. Importantly, even though the structured fluid flow is plug-like in the vertical ($\partial u / \partial z = 0$), this material still undergoes a much weaker horizontal extension. In other words, the structured fluid is not rigid, despite the infinite viscosity suggested by (3.9). This inconsistency is equivalent to the lubrication paradox of a yield-stress fluid (see Balmforth & Craster 1999) and is resolved as follows: the shallow-flow approximation of §3 amounts to the leading-order of an asymptotic expansion. Implicitly, it assumes that the viscosity of the structured fluid is sufficiently large that it suppresses the vertical shear. However, the viscosity is not taken to be so large that the extensional stresses, $\tau_{xx} \equiv -\tau_{zz}$, become promoted

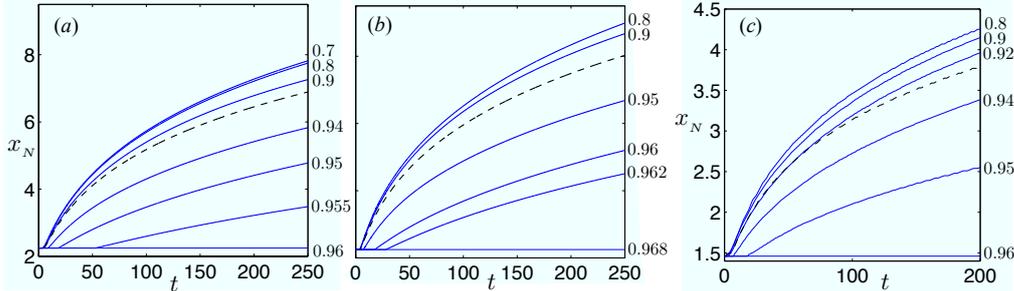


Figure 6: Position of the nose $x_N(t)$ with $\Gamma = 40$, for the values of the initial structure λ_0 indicated: (a) two-dimensional slump with $S = 0.8$; (b) two-dimensional slump with $S = 1$; (c) three-dimensional slump with $S = 1$. The dotted lines show the results for a Bingham fluid with yield stress $\tau_C = 0.1$. For the largest value of λ_0 in each subfigure, the slope is below the critical angle, and the current remains stationary.

into the leading-order balance of forces in (3.8). In other words, our structured fluid does not have an infinite viscosity, merely one that is large; in our asymptotic scheme, the underlying assumption is that $1 \ll \mu(\lambda_0) \ll \epsilon^{-1}$. Consequently, the enhanced viscosity of the structured fluid only suppresses the vertical shear, not the horizontal extension. We return to this important point later in §5.2.1.

4.2. Two-dimensional slumps on an inclined plane

4.2.1. Results

Motivated by our experiments in §5, we initiate planar, inclined slumps ($S > 0$) by taking the initial height profile to be given by the final rest state of a slumped dome on a horizontal plane. That is, $h(x, 0)$ is set by either (4.2) or (4.3), depending on the value of Γ . In order to avoid discontinuities in the stress, the initial profile is smoothed at points where the free surface has a discontinuous derivative (*i.e.* for $\Gamma > 12$, the height is smoothed at $x = 0$). Figure 5 shows numerical results for three different ageing times, with $\Gamma = 40$ ($\tau_C = 4/\Gamma = 0.1$) and $S = 1$. For comparison, panel (a) shows a solution for a Bingham fluid (an idealized yield-stress fluid with a linear constitutive law) with the same yield stress τ_C . The height profile of the Bingham current increases from the back, where the fluid remains stationary, to a maximum just behind the front. The thixotropic case with smaller ageing time ($\lambda_0 = 0.8$; panels b, e) shows broadly similar features. For longer ageing ($\lambda_0 = 0.9$ and 0.95 ; panels c, d, f), however, the current leaves behind a striking raised remnant of structured fluid, and develops a pronounced raised nose at the front. These features result because the stress on the fluid is greatest below the highest point of the initial profile; the most significant de-structuring then occurs at the centre of the current.

Time series of the position of the nose of the current $x_N(t)$ for a suite of computations at fixed $\Gamma = 40$ are shown in figure 6. For small values of λ_0 , the current travels faster than the corresponding Bingham fluid because the de-structured thixotropic material has a smaller, rate-dependent viscosity. The currents of older fluid (larger λ_0) are slower, however, and are characterized by an increasingly long delay at the beginning of the computation before the nose of the current starts to move. Moreover, if λ_0 is too large, the fluid never moves at all; this points to an age-dependent critical slope that must be exceeded in order for the fluid to collapse (compare the solutions for $S = 0.8$ and $S = 1$ in figure 6a and b). The critical slope is discussed further in §4.2.2.

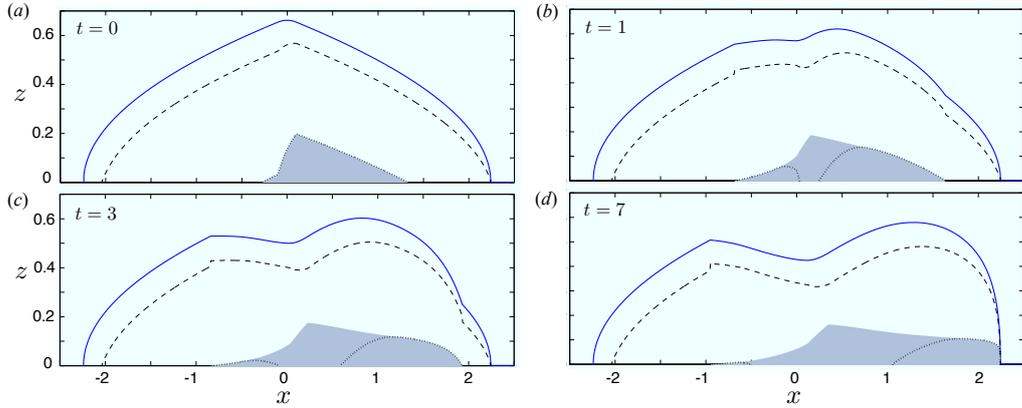


Figure 7: Four snapshots of the current in figure 5f ($\Gamma = 40$, $S = 1$, $\lambda_0 = 0.95$), at the times indicated. Shown are the height $z = h$ (solid blue) and the two stress contours $z = z_C$ (dashed), $z = z_A$ (dotted); de-structured fluid is shaded.

The initial delay in the advance of the nose arises because, at angles just above the critical value, the fluid only de-structures in the centre of the current. The dynamics is shown in more detail in figure 7, which displays the early-time evolution of the current of figure 5f with $\lambda_0 = 0.95$. At $t = 0$, the stress contour $z = z_A$ is confined to the core of the initial dome. Once the material is released, this contour propagates down the incline (and slightly upslope) due to the steepening of the local free surface, de-structuring fluid closer to the dome's edge. Simultaneously, the stress falls over the collapsing centre of the dome, and the stress contour $z = z_A$ descends through the fluid leaving behind de-structured fluid and a material yield surface. The nose of the current remains stationary until it is reached by the advancing contour $z = z_A$, which, for this example, occurs at $t \approx 7$ (panel *d*).

Results for stronger critical stresses ($\Gamma = 4$; $\tau_C = 1$) are shown in figure 8. The initial condition now has a flat central section, as given by (4.2). Nevertheless, the evolution of the current for different values of λ_0 is similar to the previous results with $\Gamma = 40$ (figure 5). One notable difference in figure 8 is the development of spatial structure on the surfaces $z = h$ and $z = Y$, which is most prominent for larger λ_0 (figure 8*b*). We have also observed similar structure in computations with other parameter settings. The structure typically takes the form of short-wavelength travelling waves on the material yield surface $z = Y$. The waves often appear when sharp horizontal gradients arise in the stress and can pose a problem with spatial resolution when the wavelength becomes too short. Both the height of the free surface and the global features of the flow remain largely unaffected by these waves, which move along the material yield surface and are damped at intersections with the critical stress contours $z = z_C$ or $z = z_A$. In the Appendix, we rationalize these waves in terms of an interfacial instability.

4.2.2. The critical slope

If the stress on the fluid layer does not exceed τ_A anywhere, the fluid remains fully structured and cannot flow. The situation corresponds to a critical slope S_c , which can be calculated analytically. When the initial dome, whose profile satisfies $|h\partial h/\partial x| = \tau_C = 4/\Gamma$ (4.1), is placed on a slope S , the stress along the base of the current becomes

$$\tau = \left| S - \frac{\partial h}{\partial x} \right| h = \left| Sh - \tau_C \operatorname{sgn} \left(\frac{\partial h}{\partial x} \right) \right|. \quad (4.4)$$

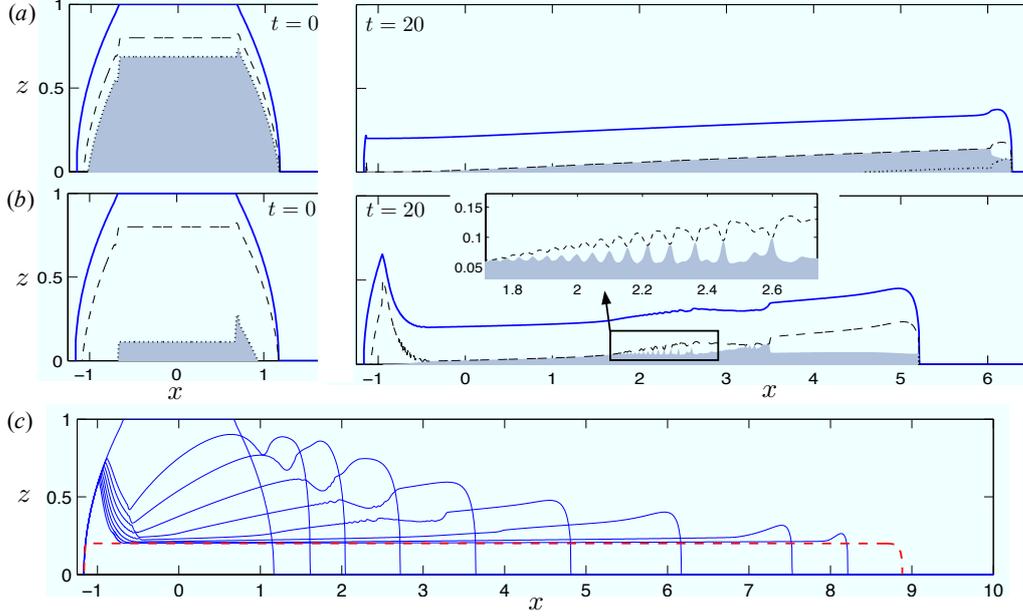


Figure 8: Inclined planar slumps for $S = 5$ and $\Gamma = 4$ ($\tau_c = 1$), at times $t = 0$ and $t = 20$, showing $z = h$ (solid blue), the two stress contours $z = z_c$ (dashed), $z = z_A$ (dotted), and de-structured fluid (shaded), for (a) $\lambda_0 = 0.8$ and (b) $\lambda_0 = 0.94$. The inset to panel (b) shows a magnification of the waves on the material yield surface. Panel (c) shows snapshots of h for $\lambda_0 = 0.94$, at times $t = 0, 1, 2, 4, 8, 16, 32, 64, 128$, together with the final rest state given by (4.7) (dashed).

The fluid will not de-structure if $\tau < \tau_A = 1/\Gamma\lambda_0(1 - \lambda_0)$. It follows, on using (4.2) and (4.3), that the critical slope S_c is

$$S_c \equiv \frac{\tau_A - \tau_c}{\max(h)} = \frac{(1 - 2\lambda_0)^2}{\Phi\lambda_0(1 - \lambda_0)}, \quad \text{where } \Phi = \begin{cases} (12\Gamma^2)^{1/3}, & \Gamma > 12, \\ \Gamma, & \Gamma \leq 12. \end{cases} \quad (4.5)$$

When the fluid is not aged, $T_{\text{age}} = 0$ and $\lambda_0 = 1/2$, which implies $S_c = 0$. The fluid therefore flows at any non-zero angle, reflecting how the slumped dome used as the initial condition is already held at its yield stress with $\tau = \tau_A$ everywhere. The addition of any degree of slope unavoidably raises τ on the downward face of the dome, thereby initiating collapse (an imitation of the behaviour of a yield-stress fluid). As the ageing time, and thus λ_0 , increases, there is an increased separation between the two stresses τ_c and τ_A , and the critical slope S_c increases. As $\lambda_0 \rightarrow 1$, $S_c \rightarrow \infty$, in which limit the shallow-layer framework of the model breaks down.

4.2.3. Final rest state

As for the slump on a horizontal plate (§4.1), the final state for an inclined current is again given by the height profile for which the stress on the base has fallen below τ_c everywhere, implying that the fluid fully re-structures. Such states are identical to those for a Bingham fluid with a yield stress $\tau_c = 4/\Gamma$ (see *e.g.* Balmforth *et al.* 2006b), and are given by

$$\left| S - \frac{\partial h}{\partial x} \right| h \leq \tau_c. \quad (4.6)$$

At the back of the current, the fluid never slumps because the basal stress on the left of (4.6) never exceeds τ_c . The slumped forward section, on the other hand, has a basal stress that approaches τ_c ; equation (4.6) then provides the implicit solution

$$\log\left(1 - \frac{S}{\tau_c}h\right) + \frac{S}{\tau_c}h = \frac{S^2}{\tau_c}(x - x_F), \quad (4.7)$$

where x_F is a constant of integration corresponding to the final position of the nose of the current; this constant is determined by matching (4.7) with the unslumped initial condition at the back of the current in such a way as to obtain the correct fluid volume.

Final profiles from (4.7) are shown in figures 5(e,f) and 8(c). The profiles are almost flat, with a steep drop at the nose, and are independent of ageing time T_{age} (*i.e.* λ_0), provided the inclination angle is greater than the critical slope S_c . The raised structured remnant at the back of the current for higher λ_0 must therefore eventually disappear; the numerical results indicate that this late stage of the evolution is much slower than the initial spreading of the current.

4.3. Three-dimensional slumps on an inclined plane

As for the planar slumps, our initial condition for three-dimensional currents on an incline is given by the profile of a slumped dome on a horizontal surface. That profile is axisymmetric and, for $V = 2$, is given by

$$h(x, y, t = 0) = \left[\frac{8}{\Gamma} \left(R - \sqrt{x^2 + y^2} \right) \right]^{1/2}; \quad R = \left(\frac{15}{8\pi} \right)^{2/5} \left(\frac{\Gamma}{2} \right)^{1/5}, \quad (4.8)$$

provided that $\Gamma > \sqrt{240/\pi} \approx 8.7$, which corresponds to the parameter setting used below. If $\Gamma < \sqrt{240/\pi}$, the fluid does not fully slump on a horizontal plane and the initial condition has a flat top analogous to the two-dimensional profile in (4.2).

Figure 9(a–e) shows a numerical solution for $\Gamma = 40$, $S = 1$, and $\lambda_0 = 0.92$. As for the planar slumps, a remnant of structured fluid is left behind at the back of the current. The remnant corresponds to the least stressed part of the initial dome, where $\tau < \tau_A$, and is similar to the “horseshoe” observed experimentally by Coussot *et al.* (2002a). As shown in figure 9(f), the extent of the structured horseshoe increases with λ_0 , or equivalently with the ageing time.

The height profile and stress curves over the midsection ($y = 0$) of the three-dimensional slump in figure 9(a–d) are qualitatively similar to those of planar currents with large λ_0 (*cf.* figure 5c–d). In particular, once again fluid yields only at the core of the initial dome and it takes a finite length of time for the yield surface to advance through the fluid to the nose of the current (see also panel e). The delayed progress of the nose of three-dimensional currents with different degree of initial structure λ_0 is compared with the results for planar slumps in figure 6.

As in two dimensions, there is an age-dependent critical angle below which the initial profile does not collapse. Similarly the final rest state of the current can be calculated by matching the unslumped part of the deposit (with a profile set by the initial condition) to the solution of

$$\left(S + \frac{\partial h}{\partial x} \right)^2 + \left(\frac{\partial h}{\partial y} \right)^2 = \frac{\tau_c^2}{h^2}, \quad (4.9)$$

corresponding to equating the basal shear stress with τ_c (*cf.* Balmforth *et al.* 2002). As in the planar case discussed in §4.2.3, this final state has no raised remnant at its back. The horseshoe must therefore be slowly eroded away over a much longer timescale than the initial rate of spreading.

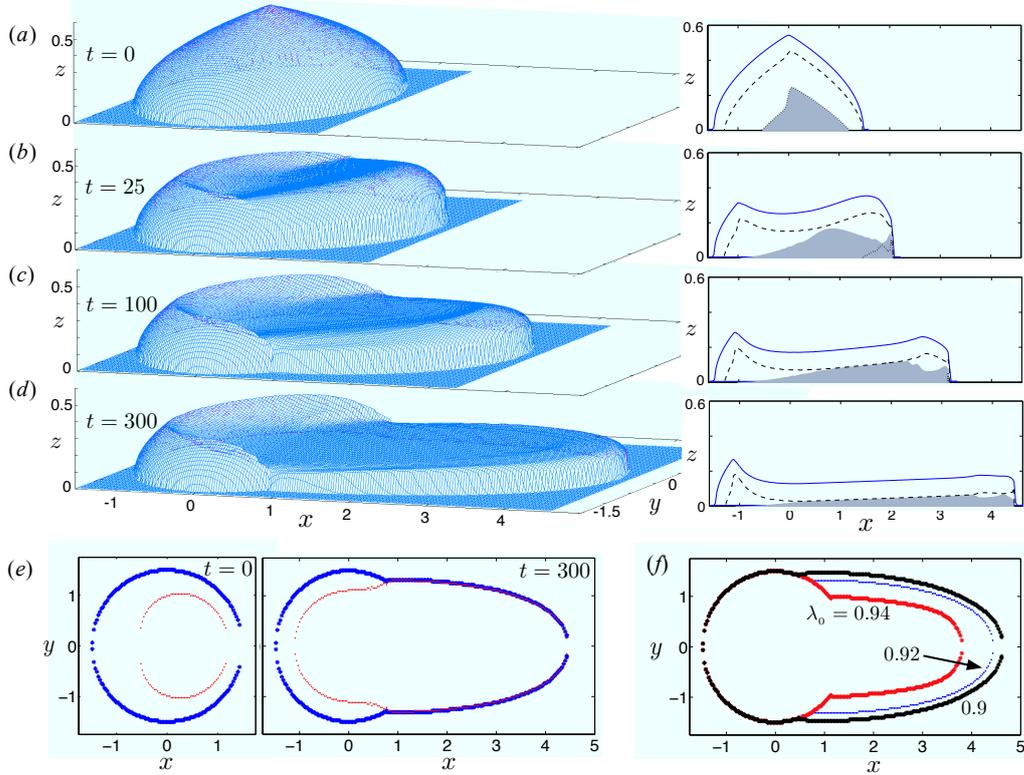


Figure 9: Three-dimensional slump on an incline with slope $S = 1$, $\lambda_0 = 0.92$ and $\Gamma = 40$. Panels (a–d) show $z = h(x, y, t)$ as a surface above the (x, y) -plane at the times indicated (left), together with the midsection ($y = 0$) profiles of h (solid), z_C (dashed), and z_A (dotted). De-structured fluid is shown shaded. Panel (e) shows the edge of the current (stars) and the border of unslumped structured fluid (dots) at $t = 0$ and 300. Panel (f) shows a comparison of the edge of the current at $t = 300$ for $\lambda_0 = 0.9, 0.92,$ and 0.94 ($\Gamma = 40, S = 1$).

5. Experiments

5.1. The set-up

We carried out a series of experiments on an inclined plane to compare with the predictions of our model. The experimental setup consisted of a 1 m^2 glass plate, which was hinged at one end, and could be tilted and held at a desired angle using a pulley system. As a model thixotropic fluid, we used a suspension of bentonite clay in filtered water (10% by volume, *Quik-Gel* sodium bentonite, *Baroid drilling fluids*). We also carried out experiments with tomato ketchup (Heinz), which are discussed very briefly in §5.3. In preparation for each experiment, the bentonite solution was vigorously stirred for twenty minutes to homogenize the fluid and destroy its internal structure. A fixed volume (150 ml) of the material was then poured into a hollow cylindrical (5 cm radius) mould set upon a horizontal plexiglass sheet whose surface had been roughened by sandpaper. Quickly raising the mould allowed the sample to slump to rest, creating a dome equivalent to the initial conditions used for the theoretical computations. The slumped dome was then left to age for a time T_{age} under an airtight cover to limit evaporation. Finally, the roughened plexiglass and its dome were fixed onto the glass plate, which

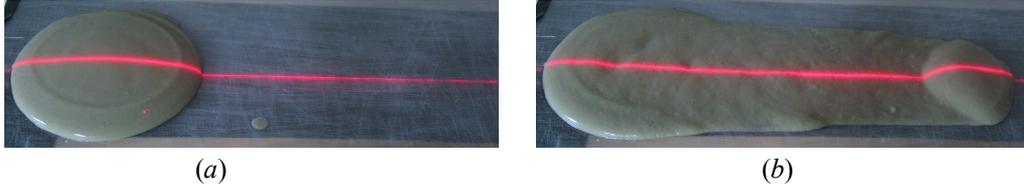


Figure 10: Snapshots of an experiment with 10% by volume bentonite solution, $T_{\text{age}} = 240$ minutes, and an angle of 20° : (a) after $t = 5$ seconds; (b) after $t = 50$ seconds. The initial diameter of the fluid is about 13 cm.

was then tilted to a desired angle. The surface of the current along its midsection was recorded using a laser line projected onto the fluid surface from directly above (figure 10). The roughening of the plexiglass sheet was essential to eliminate any macroscopic slip at the base of the current, which is known to affect bentonite solutions (*e.g.* Coussot *et al.* 2002b).

5.2. Results for bentonite

Measurements of the surface profiles of flowing currents of bentonite clay are shown in figures 11 and 12. Figure 11 shows profiles of samples with different ageing times T_{age} on inclines of 20° ; figure 12 shows profiles on slightly steeper inclines of 24° . As a comparison, we carried out some experiments with a ‘joint compound’ solution (*Sheetrock* all-purpose joint compound), which, over the timescale of an experiment, appeared very like an ideal yield-stress fluid. Measurements of the height of the joint compound are shown in figure 11(a).

The measurements confirm that the behaviour of bentonite is strongly dependent upon the ageing time. Consider, for example, the results on a 20° slope (figures 11b-d). For very small ageing times, the behaviour is similar to that of the joint compound (panel a): the fluid evolves rapidly after the experiment starts and primarily slumps forwards, piling material up towards the front. However, as the ageing time T_{age} increases, the samples behave quite differently: the current thins most dramatically in the middle, a horseshoe-shaped remnant is left behind at the back of the current, and a raised nose detaches at the front. These features are even more striking on a slope of 24° (figure 12). Note that, even in the most extreme examples, there was always a thin lubricating layer of de-structured fluid left coating the plane, and the nose did not appear to be suffering macroscopic slip over the plexiglass (which did occur when that surface was not roughened, and left almost no fluid trailing behind).

Figure 13(a-b) shows time series of the position of the nose of the current $x_N(t)$ for two different angles and a variety of ageing times T_{age} . These plots illustrate how, for small T_{age} , the current accelerates quickly at small times. However, as T_{age} increases, there is an increasingly long delay before motion begins, and then, once underway, accelerations are more gradual. Figure 13(a-b) also highlights how the current comes to an abrupt halt after flowing down the plane.

Figure 13(c) shows the final position of the nose of the current, x_F , as a function of the inclination angle, for six different ageing times T_{age} . A first conclusion that can be drawn from these results is that, if the inclination is below a critical angle that depends on the ageing time, the fluid does not move at all. Second, for small values of T_{age} , the final runout of the current x_F increases steadily with inclination angle. For larger values of T_{age} , however, the runout increases suddenly over an increasingly narrow band of angles. The oldest sample, with $T_{\text{age}} = 1080$ minutes, exhibits extremely abrupt ‘avalanching’:

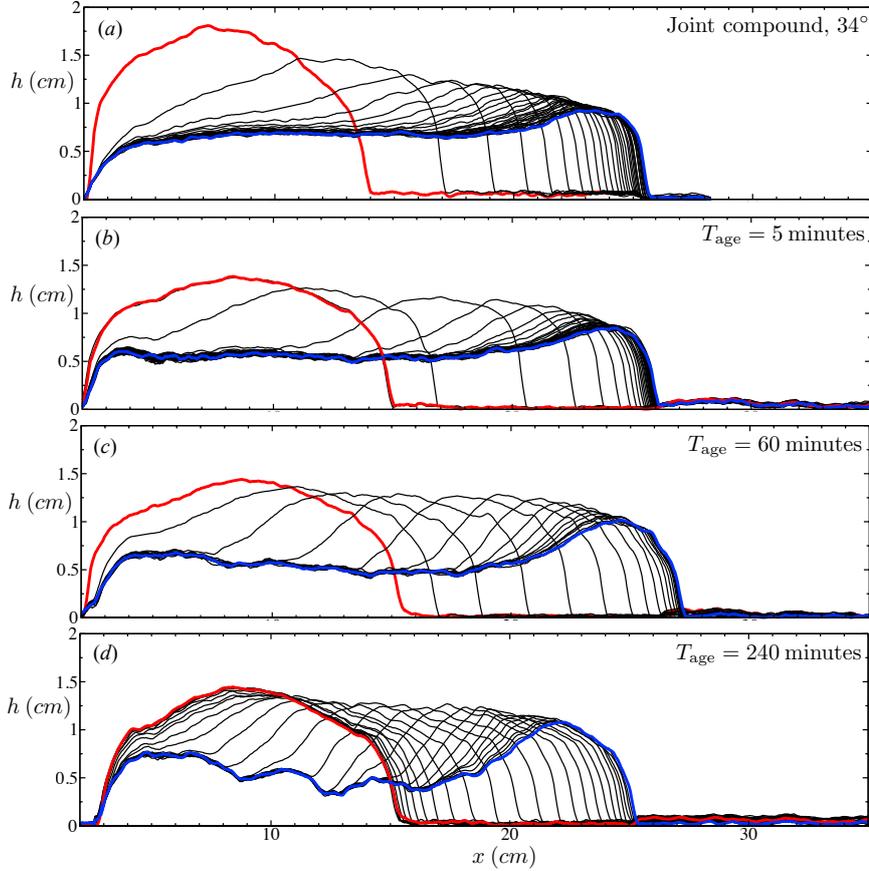


Figure 11: Experimental height profiles along the midsection of currents of joint compound and bentonite. The joint compound, shown in panel (a), flows down a 34° slope. The bentonite, shown in panel (b)–(d), is on a 20° slope and the ageing times T_{age} are indicated. The profiles are plotted every 2 seconds, except those in panel (b), which are 0.5 seconds apart. Red and blue lines signify the initial and final profiles, respectively.

at 20° the fluid remains stationary on the slope, but at 24° the fluid dramatically de-structures (after the delay illustrated in panel b) and flows off the bottom of the plate.

5.2.1. Comparison of bentonite experiments and theory

The experimental results exhibit many of the qualitative features predicted by the theoretical model. In particular, the effect of the ageing time is broadly similar. For small T_{age} (λ_0 near $1/2$), both theory and experiments show that the current behaves like a yield-stress fluid. Similarly, as T_{age} or λ_0 increases, the currents develop a pronounced horseshoe of structured fluid at the back, a thinned interior, and a raised nose at the front. The experiments confirm the theoretical prediction of a critical angle below which there is little or no flow, which increases with T_{age} (figure 13c). The flow of the current just above the critical angle becomes increasingly rapid and dramatic as T_{age} increases, in agreement with the theoretical predictions of increasingly abrupt “avalanche” behaviour.

The experiments suggest rough estimates for some of the parameters of the theory: the radius of the initial slump on a horizontal plate in the experiments can be matched

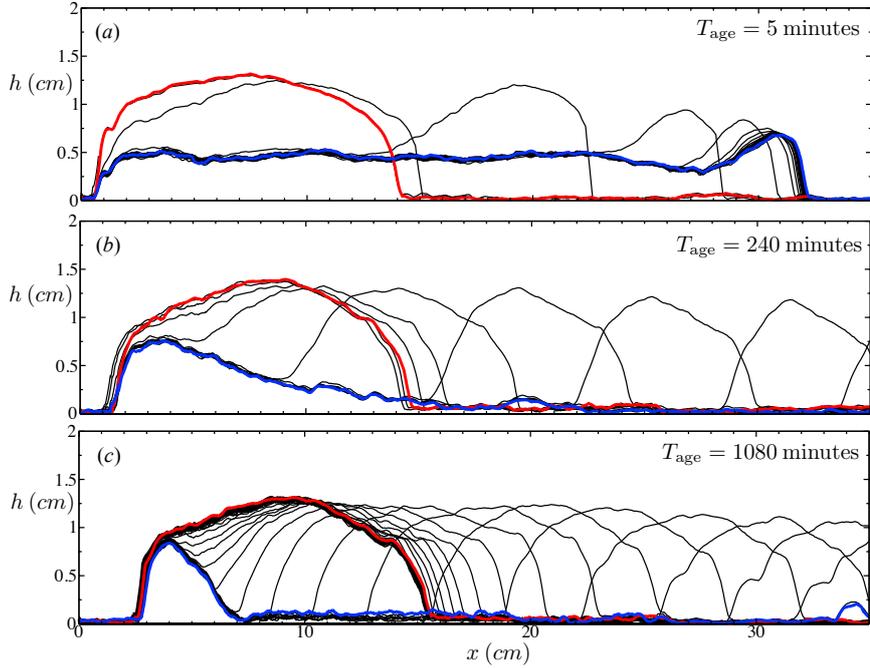


Figure 12: Experimental height profiles along the midsection of bentonite currents on a 24° slope, for the ageing times T_{age} indicated. Profiles are plotted every 2 seconds, except those in panel (a), which are 0.5 seconds apart. Red and blue lines signify the initial and final profiles, respectively. In panels (b) and (c), the current flows off the end of the plate.

with the model prediction (4.8) to give an estimate of the critical yield stress of $\tau_c \approx 16$ Pa (the density of the bentonite was 1.07 g/cm^3). This is comfortably close to the stress at which the lower viscosity bifurcation is seen in the cone-and-plate rheometry data in figure 1b. (The bentonite sample used in the rheometer was not exactly the same as the solution used for the slumps because the rheometry was performed in a different location to the experiments, and our efforts to prepare an identical solution were not completely successful.)

We can also determine the critical angle as a function of the ageing time from the measurements shown in figure 13c. By using the two-dimensional analysis of §4.2.2, we can then estimate the absolute yield stress $\tau_A(T_{\text{age}})$. We find that τ_A increases from approximately 20 Pa at $T_{\text{age}} = 5$ mins to about 50 Pa at $T_{\text{age}} = 1080$ mins. In comparison, the higher viscosity bifurcation in the rheometry data of figure 1, occurs at a stress just above 30 Pa, the material ageing for about 6 minutes before yielding. Given that $\tau_A = [\Gamma\lambda_0(1 - \lambda_0)]^{-1} = \tau_c/[4\lambda_0(1 - \lambda_0)]$, the estimates for these critical stresses imply the relation $\lambda_0(T_{\text{age}})$ plotted in figure 13d.

There are several notable differences between the experimental results and the theoretical predictions. The final theoretical state is a thin and almost flat current, which is approached extremely slowly. In the experiments, however, the flow stops abruptly and the horseshoe remnant and raised nose still decorate the deposit. One possible explanation for this disagreement is that the theoretical final state is entirely controlled by τ_c , whereas the re-structuring rheology of the bentonite is more complicated. In particular, our model ignores any material ageing during the late stages of the slump, which may be responsible for switching off the flow and leaving intact the structured remnant.

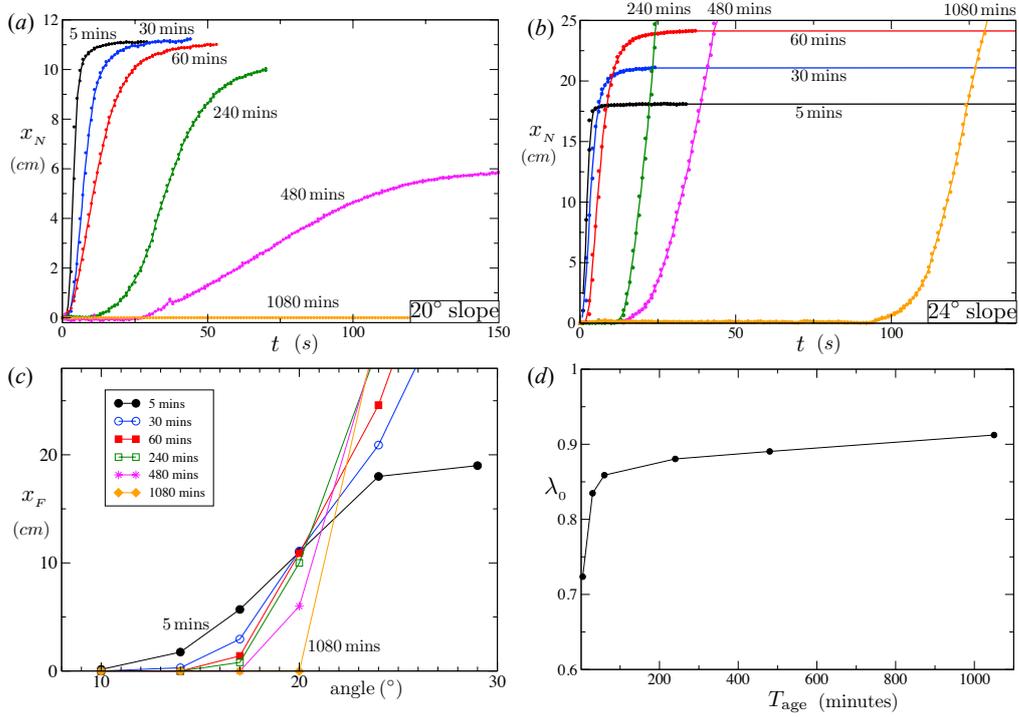


Figure 13: The position of the nose $x_N(t)$ of bentonite currents with the ageing times T_{age} indicated, on slopes of (a) 20° and (b) 24° . Panel (c) shows the final distance travelled by the nose of the current x_F , for the ageing times T_{age} indicated. Panel (d) shows the initial structure parameter λ_0 of the rheological model, as a function of the ageing time T_{age} , estimated from the data in (c), as discussed in the text.

Another difference is that, in the theory, the total distance that the current flows is a function of the slope S but is independent of λ_0 and thus of ageing, provided the slope is above the critical value. In the experiments, however, the total run-off distance is a function of both the slope and ageing time T_{age} (figure 13c). On a 24° slope (figure 13b), the older samples even travel further than the younger ones. It is possible that the rapid acceleration of these samples introduces inertial effects which are not included in the theoretical model.

In both experiments and theory there is a delay before the nose of the current starts to flow when the angle is just above its critical value. This feature was noted previously by Huynh *et al.* (2005). In the theory, the delay is the lag experienced as the yielded sections of the fluid, which first appear at the centre of the initial dome, migrate to the front. In the experiments, however, it is not so clear whether this is the underlying cause of the delay. Indeed, the delay time can be long compared (see *e.g.* figure 13b), and it is conceivable that time-dependent internal de-structuring is important, whereas it is instantaneous in the model.

Lastly, the experiments demonstrate that the fluid can de-structure even more dramatically than the model predicts, particularly if the ageing time is large. Figure 12c, for example, shows an extreme degree of thinning in the interior of the current, which we have not been able to capture with our model. This difference is perhaps due to the detailed rheology; the viscosity, for example, may depend more sensitively on the strain

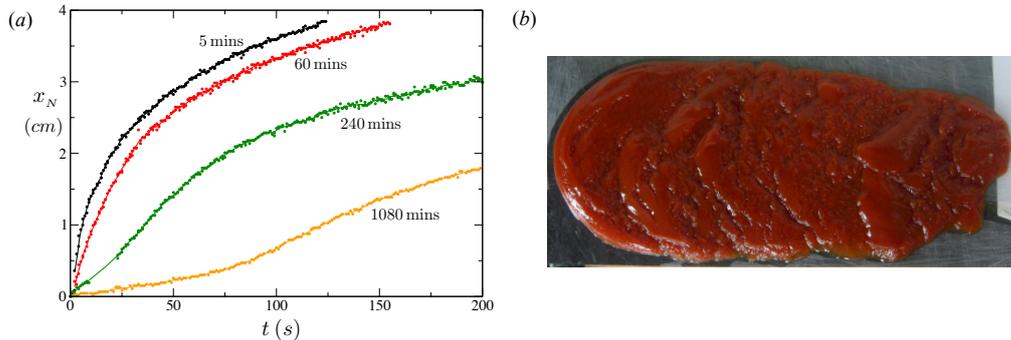


Figure 14: Experiments with Heinz tomato ketchup: (a) the position of the nose of the current $x_N(t)$ on a 14° slope for the ageing times indicated. (b) a photograph from above of a ketchup current (downslope is to the right), showing a structured horseshoe at the back (left), and significant surface texture on the rest of the current.

rate. It could also be due to the neglect of extensional stresses in the structured fluid layer. As remarked earlier in §4.1, we do not account for such extensional stresses, and the enhanced viscosity of the structured fluid only suppresses vertical shear. However, if the upper layer is sufficiently viscous, the extensional stresses can contribute to force balance along with the shear stress (as in models of free viscous films or sliding ice sheets and shelves). The inclusion of extensional stresses may lead to an increased thinning of the interior of the current and the fusion of the front and back into a rigid nose and horseshoe much like in the experiments, offering an intriguing avenue for further study.

5.3. Ketchup

We also carried out experiments using Heinz tomato ketchup. Ketchup is an interesting and complex multicomponent fluid, and is difficult to use experimentally due to its tendency to separate over time. In particular, ketchup readily expels vinegar, which gathers around the base of the sample if it is left at rest for more than a few minutes. Due to this separation problem, we only very briefly discuss the results. We observed thixotropic behaviour which, in some respects, resembled the behaviour of bentonite. In particular, for ageing times $T_{\text{age}} \gtrsim 1$ hour there was a clear horseshoe of structured ketchup left at the back of the ketchup current. As with bentonite (figure 13b), the evolution of the current changed qualitatively with ageing time: for long ageing times, the flow gradually accelerated from rest, in contrast to the behaviour for small T_{age} (figure 14a).

However, the ketchup current differed in both appearance and behaviour. It proved difficult to observe dramatic avalanche behaviour with ketchup. The current also had no pronounced nose, nor did it thin over its interior. Interestingly, the current always continued to flow throughout the duration of the experiments, rather than coming to an abrupt halt like the bentonite. The photograph of a ketchup experiment in figure 14b shows the structured horseshoe remnant, and the gravity current extending down the slope. This picture also illustrates the complex wavy structure of the surface of the current, which is perhaps the result of an interfacial instability like that which occurs in the theoretical model.

6. Conclusions

In this paper, we have presented a model for thixotropic gravity currents and compared its predictions with experiments using a solution of bentonite. There is broad qualitative agreement between theory and experiment, but there are also some interesting differences.

In our model, the degree of microstructure in the fluid is dictated by the local stress τ through a relation that allows for viscosity bifurcations at two critical yield stresses τ_A and τ_C . Solid-like structured fluid can only de-structure and flow once the stress upon it exceeds the first critical stress τ_A . Conversely, de-structured fluid abruptly re-structures back to the solid-like state if the stress falls below the second critical stress τ_C . By allowing τ_A to depend on the length of time the fluid has been left standing, we accommodate a dependence on the initial ageing time T_{age} . Our thixotropic law describes scenarios in which the evolution of the structure at the two critical stresses is rapid and all other material ageing is slow, in comparison to the timescales of the flow.

For a mound of fluid placed on an inclined plane, if the local stress is nowhere above τ_A , the fluid cannot yield. Hence there is an critical angle below which the fluid will not flow, which increases with ageing time. Above the critical angle, fluid de-structures and begins to move. The de-structured fluid remains yielded and continues to flow until the local stress falls below $\tau_C < \tau_A$. Consequently, the current flows much further than might be expected. With longer ageing times, the critical stresses τ_A and τ_C become more separated, increasing the critical angle and the degree of thinning once this threshold is exceeded. As a result, the fluid avalanches more dramatically. The flow also becomes increasingly characterised by a raised nose at the fluid front and a remnant of structured fluid at the back, which, in three dimensions, takes the shape of a horseshoe. Experiments with bentonite clay show qualitatively similarities with all these features of the dynamics.

The theory and experiments differ most notably in their final states: in the theory the flow slowly evolves to an almost flat profile, with the raised nose remnant at the back slowly eroding away over a very long timescale. In the experiments, however, the bentonite came to an abrupt halt with a persistent raised nose and horseshoe. The experimental flows also thin more dramatically than those of the model. These discrepancies could be due to the neglect of extensional stresses of the structured fluid in the model, or a more complicated time-dependent thixotropic rheology.

The majority of this work took place during the 2012 Geophysical Fluid Dynamics summer program at Woods Hole Oceanographic Institution, which is supported by the National Science Foundation and the Office of Naval Research. We thank the directors, staff and fellows of the program, and particularly Anders Jensen for his assistance with the experiments.

Appendix A. Interfacial instability

Superposed, inclined shallow layers of Newtonian (Chen 1993) or power-law (Balmforth *et al.* 2003) fluid with differing viscosities can be unstable to an interfacial instability, even in the absence of inertia. An analogous instability arises in our model for a thixotropic gravity current when the yield surface is a material curve separating structured fluid above from de-structured fluid below. In this Appendix, we explore the instability for the simpler problem of a uniform shallow sheet in two dimensions, assuming that the yield surface remains separated from $z = z_A$ and $z = z_C$. The governing equations (3.16)-(3.17)

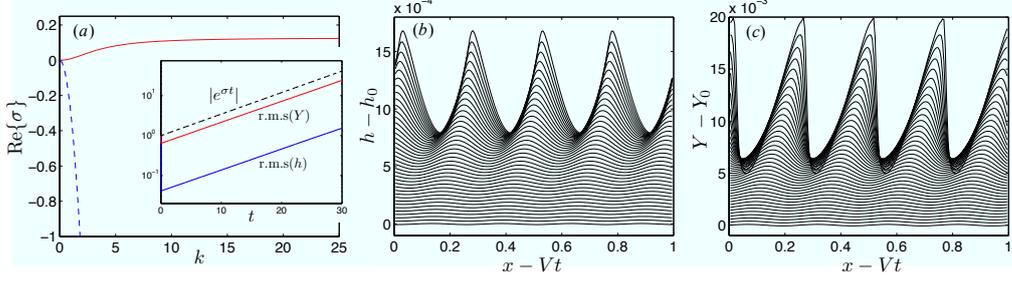


Figure 15: Interfacial instability of a uniform sheet for $\Gamma = 40$, $\lambda_0 = 0.9$, $h_0 = 1$ and $Y_0 = 0.5$. Panel (a) shows the unstable (solid) and stable (dashed) roots of the dispersion relationship (A 5). Panels (b-c) show numerical solutions for h and Y , respectively, from an initial-value problem beginning with the uniform flow plus a small perturbation with wavenumber 8π and the spatial form of the unstable normal mode. The solutions are plotted at each time unit and vertically offset, in a frame moving at a speed V close to the modal phase speed. Note the different vertical scales in panels (b) and (c). The inset of (a) shows the root-mean-squared values of $h - h_0$ and $Y - Y_0$ against time, along with the trend of the unstable mode.

are then

$$\frac{\partial h}{\partial t} + \frac{\partial}{\partial x} F(h, h_x, Y) = 0, \quad \frac{\partial Y}{\partial t} + \frac{\partial}{\partial x} G(h, h_x, Y) = 0, \quad (\text{A } 1a, b)$$

where

$$F(h, h_x, Y) = \int_0^h u \, dz = (S - h_x) \int_0^Y (h - z)^2 (1 - \lambda) (1 - \lambda/\lambda_0) \, dz, \quad (\text{A } 2)$$

$$G(h, h_x, Y) = \int_0^Y u \, dz = (S - h_x) \int_0^Y (h - z) (Y - z) (1 - \lambda) (1 - \lambda/\lambda_0) \, dz, \quad (\text{A } 3)$$

and the subscript on h_x refers to a partial derivative. The fluxes F and G can be evaluated analytically using

$$\lambda = \lambda_- = \frac{1}{2} \left[1 - \left(1 - \frac{4}{\Gamma (h - z) (S - h_x)} \right)^{1/2} \right], \quad (\text{A } 4)$$

which comes from (2.5b).

Equations (A 1) have the uniform equilibrium solution $h = h_0$ and $Y = Y_0$. Normal-mode perturbations to this base state of the form $e^{\sigma t + i k x}$, with wavenumber k and growth rate σ , satisfy a dispersion relationship

$$\sigma^2 + \sigma (A k^2 + i B k) + i C k^3 + D k^2 = 0, \quad (\text{A } 5)$$

where

$$A = \frac{\partial F}{\partial h_x}, \quad B = \frac{\partial F}{\partial h} + \frac{\partial G}{\partial Y}, \quad C = -\frac{\partial G}{\partial h_x} \frac{\partial F}{\partial Y}, \quad D = \frac{\partial G}{\partial h} \frac{\partial F}{\partial Y} - \frac{\partial G}{\partial Y} \frac{\partial F}{\partial h}, \quad (\text{A } 6a, b, c, d)$$

all evaluated at $h = h_0$, $Y = Y_0$, and $h_x = 0$. It follows from (A 5) that $\text{Re}\{\sigma\} = 0$ only if $k = 0$; that is, the uniform flow is either unstable or stable for all wavenumbers. For $k \gg 1$, we find the two solutions,

$$\text{Re}\{\sigma_1\} = -A k^2 + O(1), \quad \text{Re}\{\sigma_2\} = \frac{C^2 - ABC - A^2 D}{A^3} + O(k^{-1}). \quad (\text{A } 7a, b)$$

On examining the partial derivatives of F and G in more detail, one can establish that the first solution is stable ($A > 0$) whereas the second can be unstable (if $C^2 - ABC - A^2D > 0$). With a little more effort, one can show that the growth rate of the unstable solution increases monotonically from zero at $k = 0$ up to the constant maximum given by (A 7b), and has finite phase speed $c = -\text{Im}\{\sigma\}/k$. With parameter settings guided by the full slump problem considered in the main text, it turns out that the growth rate of instability is typically relatively small in magnitude, rather less than the corresponding phase speed. Hence, the perturbations propagate much faster than they grow. Typical solutions of (A 5) are shown in figure 15(a).

The system (A 1) can also be solved numerically with periodic boundary conditions to explore the nonlinear dynamics of the interfacial instability, starting from a small perturbation to the uniform base flow. Figures 15(b-c) shows the results of such an initial-value computation, starting with a perturbation with wavenumber $k = 8\pi$, corresponding to 4 waves. The instability develops as predicted by linear theory and is more prominent on the yield surface than on the free surface. In the non-linear regime, the instability leads to the formation of shocks on the material yield surface, with the same wavenumber as the original perturbation. These shocks generate high wavenumber oscillations on the scale of the grid, which is likely an artefact of the numerical scheme used to solve the equations.

REFERENCES

- ALEXANDROU, A.N., CONSTANTINOU, N. & GEORGIU, G. 2009 Shear rejuvenation, aging and shear banding in yield stress fluids. *J. Non-Newtonian Fluid Mech.* **158**, 6–17.
- BALMFORTH, N.J. & CRASTER, R.V. 1999 A consistent thin-layer theory for Bingham plastics. *J. Non-Newtonian Fluid Mech.* **84**, 65–81.
- BALMFORTH, N.J., CRASTER, R.V., PERONA, P., RUST, A.C. & SASSI, R. 2006a Viscoplastic dam breaks and the Bostwick consistometer. *J. Non-Newtonian Fluid Mech.* **142**, 63–78.
- BALMFORTH, N.J., CRASTER, R.V., RUST, A.C. & SASSI, R. 2006b Viscoplastic flow over an inclined surface. *J. Non-Newtonian Fluid Mech.* **139**, 103–127.
- BALMFORTH, N.J., CRASTER, R.V. & SASSI, R. 2002 Shallow viscoplastic flow on an inclined plane. *J. Fluid Mech.* **470**, 1–29.
- BALMFORTH, N.J., CRASTER, R.V. & TONIOLO, C. 2003 Interfacial instability in non-Newtonian fluid layers. *Phys. Fluids* **15**, 3370–3384.
- BARNES, H.A. 1997 Thixotropy — a review. *J. Non-Newtonian Fluid Mech.* **70**, 1–33.
- BONN, D., TANAKA, H., COUSSOT, P. & MEUNIER, J. 2004 Ageing, shear rejuvenation and avalanches in soft glassy materials. *J. Phys. Condens. Matter* **16**, S4987–S4992.
- CHEN, K.P. 1993 Wave formation in the gravity-driven low Reynolds number flow of two liquid films down an inclined plane. *Phys. Fluids A* **5**, 3038.
- COUSSOT, P., NGUYEN, Q.D., HUYNH, H.T. & BONN, D. 2002a Avalanche behaviour in yield stress fluids. *Phys. Rev. Lett.* **88**, 175501.
- COUSSOT, P., NGUYEN, Q.D., HUYNH, H.T. & BONN, D. 2002b Viscosity bifurcation in thixotropic, yielding fluids. *J. Rheol.* **46**, 573–589.
- DULLAERT, K. & MEWIS, J. 2006 A structural kinetics model for thixotropy. *J. Non-Newtonian Fluid Mech.* **139**, 21–30.
- HENRIQUEZ, J. & SIMMS, P. 2009 Dynamics imaging and modelling of multilayer deposition of gold paste tailings. *Minerals Engineering* **22**, 128–139.
- HUPPERT, H.E. 1982 The propagation of two-dimensional and axisymmetric viscous gravity currents over a rigid horizontal surface. *J. Fluid Mech.* **121**, 43–58.
- HUYNH, H.T., ROUSSEL, N. & COUSSOT, P. 2005 Ageing and free surface flow of a thixotropic fluid. *Phys. Fluids* **17**, 033101.
- KHALDOUN, A., MOLLER, P., FALL, A., WEGDAM, G., DE LEEUW, B., MÉHEUST, Y., FOSSUM, J.O. & BONN, D. 2009 Quick clay and landslides of clayey soils. *Phys. Rev. Lett.* **103**, 188301.

- LISTER, J.R. 1992 Viscous flows down an inclined plane from point and line sources. *J. Fluid Mech.* **242**, 631–653.
- LIU, K.F. & MEI, C.C. 1989 Slow spreading of a sheet of Bingham fluid on an inclined plane. *J. Fluid Mech.* **207**, 505–529.
- MEWIS, J. & WAGNER, N.J. 2009 Thixotropy. *Adv. Colloid Interface Sci.* **147-148**, 214–227.
- MOLLER, P., FALL, A., CHIKKADI, V., DERKS, D. & BONN, D. 2009 An attempt to categorize yield stress fluid behaviour. *Phil. Trans. R. Soc. A* **367**, 5139–5155.
- MOLLER, P., MEWIS, J. & BONN, D. 2006 Yield stress and thixotropy: on the difficulty of measuring yield stress in practice. *Soft Matter* **2**, 274–283.
- PUTZ, A.M.V. & BURGHELEA, T.I. 2009 The solid-fluid transition in a yield stress shear thinning physical gel. *Rheol. Acta* **48**, 673–689.
- SIMMS, P., WILLIAMS, M.P.A., FITTON, T.G. & MCPHAIL, G. 2011 Beaching angles and evolution of stack geometry for thickened tailings - a review. In *Paste 2011 Proceedings of the 14th International Seminar on Paste and Thickened Tailings, Perth, Australia* (ed. R.J. Jewell & A.B. Fourie), pp. 323–338.